



Certification Information



OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.

ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LEDs.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCad battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.

HOUSING

- Durable, powder-coated 20-gauge steel construction in white or black finish.
- Field selectable knockout Chevron directional indicators.
- Unique design allows double face conversion in the field.

MOUNTING


- Mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

ORDERING INFORMATION

ITEM NUMBER	No. of FACES	LETTER COLOR	HOUSING COLOR	BATTERY	OPTIONS
DZ-SXTEU	2 - Universal Single/ Double Face	R-Red	W-White	(blank)-AC-Only	SDT- Self-Diagnostics ¹
		G-Green	B-Black	EM-Battery Backup	

Due to continuous improvements, the information herein may be changed without notice

DIMENSIONS

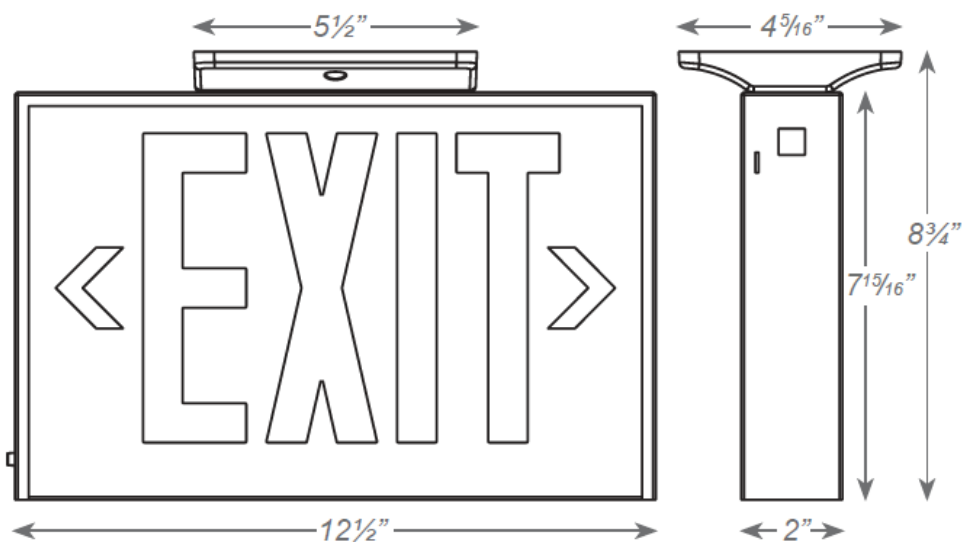

ELECTRICAL INFORMATION	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
DZ-SXTEU-RED/GREEN/EM/SDT	3.8	3.8	0.034	0.020