



Certification Information



ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LEDs.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Polycarbonate mounting canopy included for top or end mount.

OPTIONS

- HTR: Optional internal heater for cold temperature applications.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (10°C – 40°C).
- Certified to CEC under Title 20 Regulations.


HOUSING

- 5VA flame retardant, UV-stabilized polycarbonate gray finish.
- High-impact resistant, UV-stabilized polycarbonate clear lens.
- Corrosion-resistant enclosure with engineering grade silicone gasket.
- Knockouts provided for conduit feed applications.
- EZ snap-out Chevron directional indicators .

ORDERING INFORMATION

ITEM NUMBER	No. of FACES	LETTER COLOR	BATTERY	OPTIONS
DZ-WLXTE	1 - Single Face	R-Red	(blank)-AC-Only	HTR -I nternal Heater ¹
		G-Green	EM-CW-Battery Backup	USA - Assembled in USA

DIMENSIONS

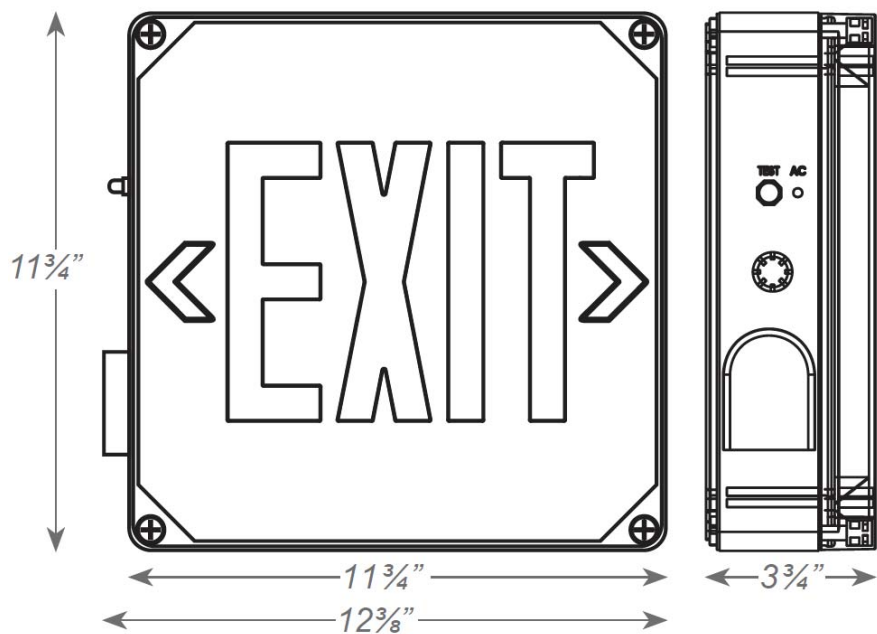

ELECTRICAL INFORMATION	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
DZ-WLXTE/EM	5.4	5.4	0.045	0.019