

FLOOD LIGHTS

ZINC

Catalog #		Type
Project		
Comments		Date
Prepared by		

Product Specifications

- MODEL DZ-FL0012
- DESCRIPTION Compact sega UniLink floodlights with earth spike for private area illumination of items, plants, and architectural features. Economical and long-lasting luminaires that may be utilised for both general lighting and dramatic accent lighting.
- MATERIAL ALUMINUM
- POWER 35-110W
- VOLTAGE 120V-277V
- LIGHT SOURCE LED
- BEAM ANGLE 107DEGREE
- OPERATION TEMPERATURE -40°C TO 50°C
- COLOR RENDERING INDEX (CRI) 70CRI
- INGRESS PROTECTION IP66
- CERTIFICATION UL LISTED



ORDERING INFORMATION

SERIES	POWER	LIGHT SOURCE	LUMEN	MOUNTING	CCT	FINISH
DZ-FL0012	35W	LED	2900-24000LM	KNUCKLE	3000K	BRONZE
	65W			SLIPFITTER	4000K	WHITE
	90W			TRUNNION	5000K	BLACK
	110W					

PERFORMANCE DATA

			4000K(70CRI)		5000K(70CRI)	
SYSTEM WATTS	Beam Angle	VOLTAGE	LUMENS	LPW	LUMENS	LPW
35W	107°	120-277VAC	3500lm	100 lm/W	3600lm	103 lm/W
45W	107°	120-277VAC	5300lm	113 lm/W	5300lm	113 lm/W
65W	107°	120-277VAC	7300lm	112 lm/W	7400lm	114 lm/W
70W	107°	120-277VAC	8800lm	126 lm/W	8900lm	127 lm/W
90W	107°	120-277VAC	10500lm	117 lm/W	11000lm	122 lm/W
110W	107°	120-277VAC	11800lm	107 lm/W	12500lm	124 lm/W
140W	7Hx6V	120-277VAC	16400lm	117 lm/W	16700lm	119 lm/W
200W	7Hx6V	120-277VAC	23400lm	117 lm/W	24000lm	120 lm/W
145W	7Hx6V	347/480VAC	16400lm	113 lm/W	16700lm	115 lm/W
205W	7Hx6V	347/480VAC	23400lm	114 lm/W	24000lm	117 lm/W

MOUNTING;

SMALL SIZE MOUNTING OPTION

G 1/2" Knuckle Mount

Die-cast aluminum knuckle provides flexibility in mounting from a variety of area



Trunnion Mount

Die-cast aluminum trunnion is easily adapted to many surfaces and allows easy fixture aiming angles



MEDIUM & LARGE SIZE MOUNTING

OPTION G 1/2" Knuckle Mount (For medium size only) Die-cast aluminum knuckle provides flexibility in mounting from a variety of area



Slipfitter Mount

Die-cast aluminum slipfitter mounts on 2 3/8" to 3" O.D. tenon easily



Trunnion Mount

Die-cast aluminum trunnion is easily adapted to many surfaces and allows easy fixture aiming angles




DEZINE




DIMENSION:

Knuckle Mount(35W&45W&65W)


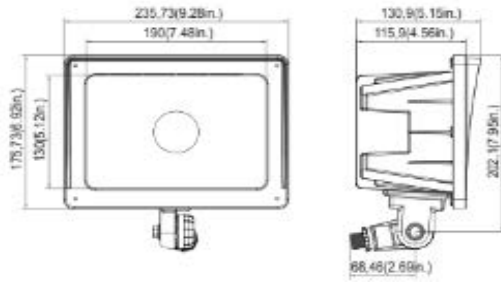


Trunnion Mount(35W&45W&65W)

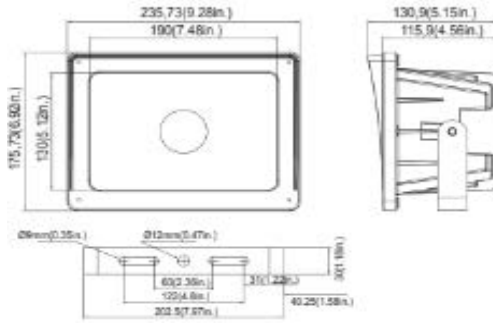


Slipfitter Mount(70W&90W&110W)


Knuckle Mount(70W&90W&110W)

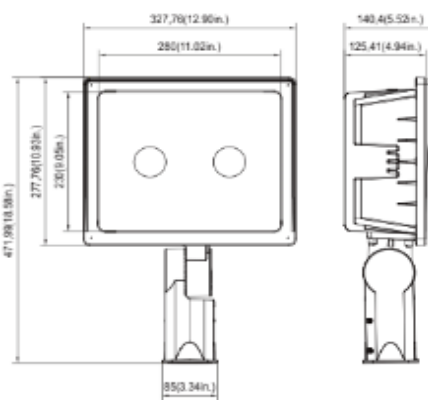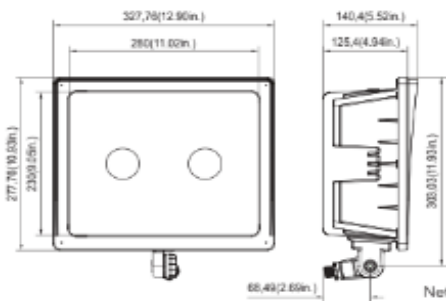

Trunnion Mount(70W&90W&110W)

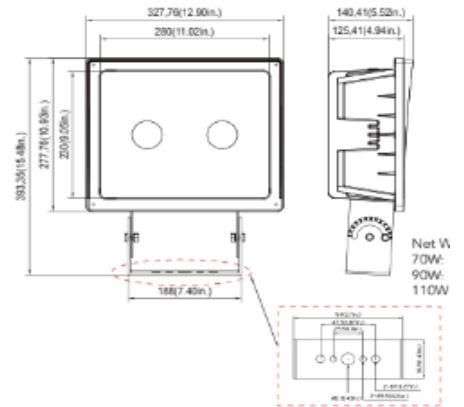

Slipfitter Mount(140W&200W)

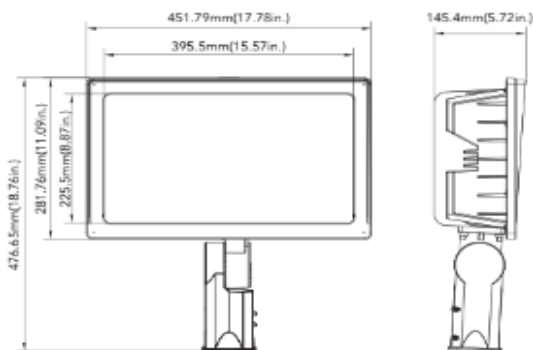

Trunnion Mount(140W&200W)

